

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 May 2005 (12.05.2005)


PCT

(10) International Publication Number
WO 2005/042993 A1

- (51) International Patent Classification⁷: F16C 33/12 (74) Agent: FORRESTER KETLEY & CO; Forrester House, 52 Bounds Green Road, London N11 2EY (GB).
- (21) International Application Number: PCT/GB2004/003908 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 13 September 2004 (13.09.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0323095.0 2 October 2003 (02.10.2003) GB
- (71) Applicant (for all designated States except US): MINEBEA CO. LTD. [JP/JP]; 4107-73 Oaza Miyota, Miyota-Machi Kitasaku-gun, Nagano 389-0293 (JP).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): SMITH, Paul, Raymond [GB/GB]; NMB-Minebea U.K. Ltd., Doddington Road, Lincoln LN6 3RA (GB).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SELF-LUBRICATING BEARINGS

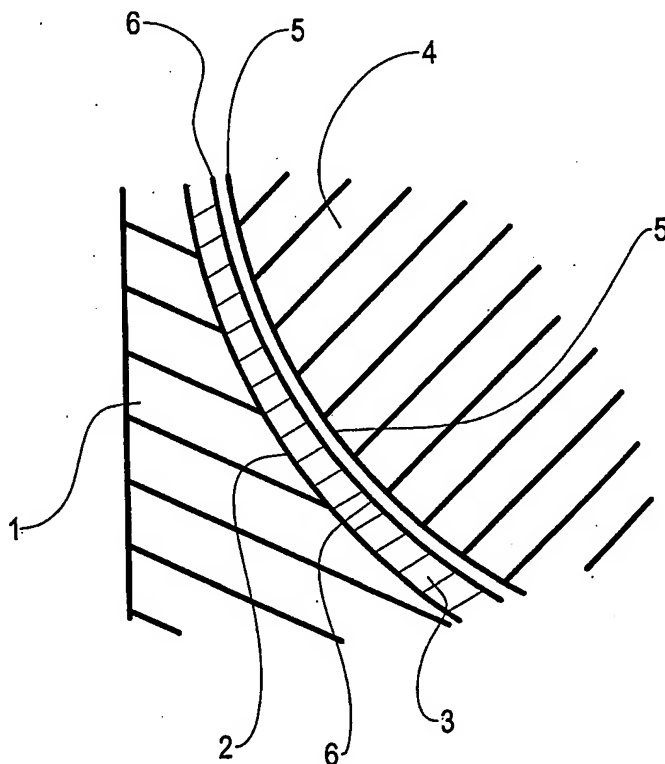

(57) Abstract: A self-lubricating bearing for use in low pressure, high frequency, small amplitude applications and methods of operating and constructing the same, the bearing having a self-lubricating liner (3) and a counterface surface (5) in close sliding contact therewith, the counterface surface (5) having a surface finish of less than 20nm and a hardness of less than in the region of 1000VHN.

WO 2005/042993 A1



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.